# Bansbach easylift

THE WORLD OF MOTION

Quick Ship



# **Size 3/10**


Extension force: 10 - 100N

| stroke | extended<br>length (EL2) | part number | force<br>[N]   |
|--------|--------------------------|-------------|--|
| 20     | 72                       | QS-10-020   | 10 - 100 N In case of an order, it is essential to mention |
| 30     | 92                       | QS-10-030   |  |
| 40     | 112                      | QS-10-040   |  |
| 50     | 132                      | QS-10-050   |  |
| 60     | 152                      | QS-10-060   |  |
| 80     | 192                      | QS-10-080   |  |


#### **Technical information:**

- Shipment in general within 5-10 working days upon receipt of your order (up to 25 pieces)
- The extension force must be indicated on the order
- Connecting parts, if chosen, will be enclosed
- Material: Piston rod: CeramPro®-coated Cylinder: powder-coated black
- Normal speed and end damping
- You will find general information and technical details in our main catalogue
- You will find customized gas springs in our main catalogue

## **Optional connecting parts**

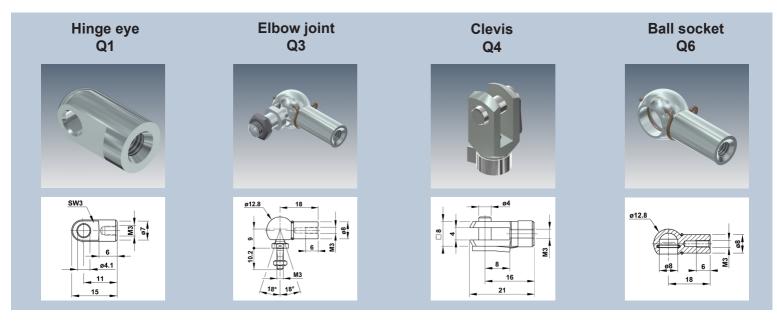

Technische Änderungen und Druckfehler vorbehalten. The flyer is subject to technical alterations and printing mistakes.







# **Size 4/12**


Extension force: 10 - 180N

| stroke                                  | extended<br>length (EL2)                    | part number  | force<br>[N]   |
|---|---|--|--|
| 20<br>30<br>40<br>50<br>60<br>80<br>100 | 72<br>92<br>112<br>132<br>152<br>192<br>232 | QS-12-020<br>QS-12-030<br>QS-12-040<br>QS-12-050<br>QS-12-060<br>QS-12-080<br>QS-12-100<br>QS-12-120 | 10 - 180 N In case of an order, it is essential to mention |
| 150                                     | 272<br>332                                  | QS-12-150  |  |


#### **Technical information:**

- If we receive the order by 12 am, shipment will be in general on the next working day (up to 25 pieces)
- The extension force must be indicated on the order
- The Bansbach 4/12 Quick Ship gas springs include a valve
- Connecting parts, if chosen, will be enclosed
- Material: Piston rod: CeramPro®-coated Cylinder: powder-coated black
- Normal speed and end damping
- You will find general information and technical details in our main catalogue
- You will find customized gas springs in our main catalogue

## **Optional connecting parts**

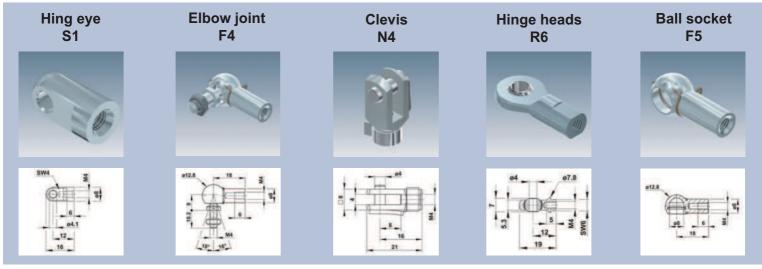

Technische Änderungen und Druckfehler vorbehalten. The flyer is subject to technical alterations and printing mistakes.



Tel. +49 (0) 7172/9107-0 Fax +49 (0) 7172/9107-44





# Size 6/15


Extension force: 20 - 400N

| stroke   | extended<br>length (EL2)                                   | part number  | force<br>[N]   |
|--|--|--|--|
| 20<br>40<br>50<br>60<br>80<br>100<br>120<br>150<br>200 | 67<br>107<br>127<br>147<br>187<br>227<br>267<br>327<br>427 | QS-15-020<br>QS-15-040<br>QS-15-050<br>QS-15-060<br>QS-15-080<br>QS-15-100<br>QS-15-120<br>QS-15-120 | 20 - 400 N In case of an order, it is essential to mention |


#### **Technical information:**

- If we receive the order by 12 am, shipment will be in general on the next working day (up to 25 pieces)
- The extension force must be indicated on the order
- The Bansbach 6/15 Quick Ship gas springs include a valve
- Connecting parts, if chosen, will be enclosed
- Material:
   Piston rod: CeramPro®-coated
   Cylinder: powder-coated black
- normal speed and end damping
- You will find general information and technical details in our main catalogue
- You will find customized gas springs in our main catalogue

## **Optional connecting parts**

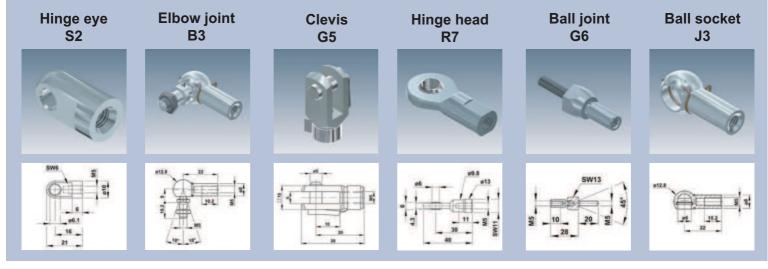

Technische Änderungen und Druckfehler vorbehalten. The flyer is subject to technical alterations and printing mistakes.



Tel. +49 (0) 7172/9107-0 Fax +49 (0) 7172/9107-44





# **Size 8/19**

Extension force: 50 - 700N

| stroke | extended<br>length (EL2) | part number | force<br>[N]   |
|--------|--------------------------|-------------|--|
| 50     | 164                      | QS-19-050   | 50 - 700 N In case of an order, it is essential to mention |
| 100    | 264                      | QS-19-100   |  |
| 150    | 364                      | QS-19-150   |  |
| 200    | 464                      | QS-19-200   |  |
| 250    | 564                      | QS-19-250   |  |
| 300    | 664                      | QS-19-300   |  |


#### **Technical information:**

- If we receive the order by 12 am, shipment will be in general on the next working day (up to 25 pieces)
- The extension force must be indicated on the order
- The Bansbach 8/19 Quick Ship gas springs include a valve
- Connecting parts, if chosen, will be enclosed
- Material:


Piston rod: CeramPro®-coated Cylinder: powder-coated black

- Slow speed, strong end damping
- You will find general information and technical details in our main catalogue
- You will find customized gas springs in our main catalogue

## **Optional connecting parts**

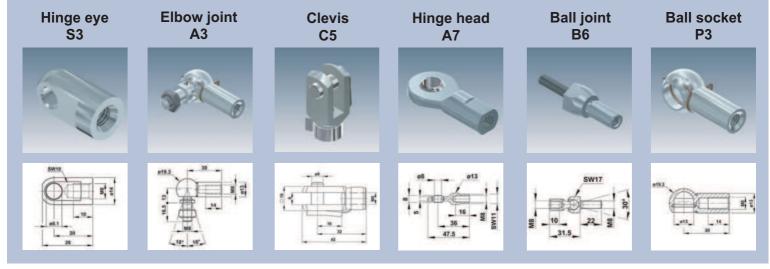

Technische Änderungen und Druckfehler vorbehalten. The flyer is subject to technical alterations and printing mistakes.



Tel. +49 (0) 7172/9107-0 Fax +49 (0) 7172/9107-44





# **Size 10/22**


Extension force: 80 - 1.300N

| stroke | extended<br>length (EL2) | part number | force<br>[N]               |
|--------|--------------------------|-------------|----------------------------|
| 50     | 164                      | QS-22-050   | 80 - 1.300 N               |
| 100    | 264                      | QS-22-100   |                            |
| 150    | 364                      | QS-22-150   | In case of an order, it is |
| 200    | 464                      | QS-22-200   | essential to               |
| 250    | 564                      | QS-22-250   | mention                    |
| 300    | 664                      | QS-22-300   |                            |
| 350    | 764                      | QS-22-350   |                            |
| 400    | 864                      | QS-22-400   |                            |
| 450    | 964                      | QS-22-450   |                            |
| 500    | 1064                     | QS-22-500   |                            |
| 550    | 1164                     | QS-22-550   |                            |
| 600    | 1264                     | QS-22-600   |                            |
| 650    | 1364                     | QS-22-650   |                            |
| 700    | 1464                     | QS-22-700   |                            |


#### **Technical information:**

- If we receive the order by 12 am, shipment will be in general on the next working day (up to 25 pieces)
- The extension force must be indicated on the order
- The Bansbach 10/22 Quick Ship gas springs include a valve
- Connecting parts, if chosen, will be enclosed
- Material: Piston rod: CeramPro®-coated Cylinder: powder-coated black
- Slow speed, strong end damping
- You will find general information and technical details in our main catalogue
- You will find customized gas springs in our main catalogue

## **Optional connecting parts**

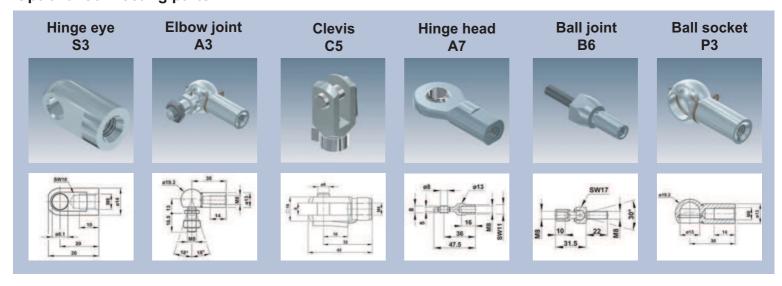

Technische Änderungen und Druckfehler vorbehalten. The flyer is subject to technical alterations and printing mistakes.



Tel. +49 (0) 7172/9107-0 Fax +49 (0) 7172/9107-44





# Size 14/28


Extension force: 150 - 2.500N

| stroke | extended<br>length (EL2) | part number | force<br>[N]               |
|--------|--------------------------|-------------|----------------------------|
| 100    | 262                      | QS-28-100   | 150 - 2.500 N              |
| 150    | 362                      | QS-28-150   |                            |
| 200    | 462                      | QS-28-200   | In case of an order, it is |
| 250    | 562                      | QS-28-250   | essential to               |
| 300    | 662                      | QS-28-300   | mention                    |
| 350    | 762                      | QS-28-350   |                            |
| 400    | 862                      | QS-28-400   |                            |
| 450    | 962                      | QS-28-450   |                            |
| 500    | 1062                     | QS-28-500   |                            |
| 550    | 1162                     | QS-28-550   |                            |
| 600    | 1262                     | QS-28-600   |                            |
| 650    | 1362                     | QS-28-650   |                            |
| 700    | 1462                     | QS-28-700   |                            |
| 750    | 1562                     | QS-28-750   |                            |


#### **Technical information:**

- If we receive the order by 12 am, shipment will be in general on the next working day (up to 25 pieces)
- The extension force must be indicated on the order
- The Bansbach 14/28 Quick Ship gas springs include a valve
- Connecting parts, if chosen, will be enclosed
- Material: Piston rod: CeramPro®-coated Cylinder: powder-coated black
- Slow speed, strong end damping
- You will find general information and technical details in our main catalogue
- You will find customized gas springs in our main catalogue

## **Optional connecting parts**

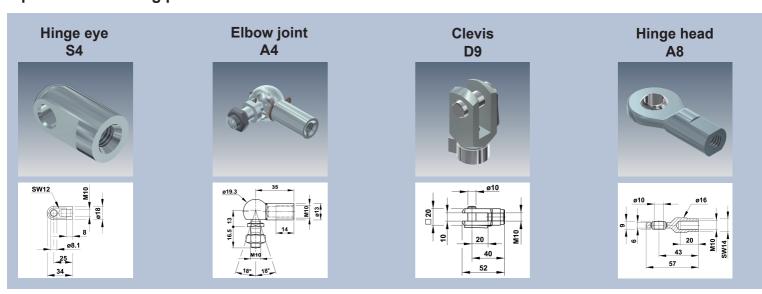

Technische Änderungen und Druckfehler vorbehalten. The flyer is subject to technical alterations and printing mistakes.



Tel. +49 (0) 7172/9107-0 Fax +49 (0) 7172/9107-44





# Size 20/40


Extension force: 500 - 5.000N

| stroke             | extended<br>length (EL2) | part number                                      | force<br>[N]                                   |
|--------------------|--------------------------|--|--|
| 100<br>150<br>200  | 317<br>417<br>517        | QS-40-100<br>QS-40-150<br>QS-40-200              | 500 - 5.000 N<br>In case of an<br>order, it is |
| 300<br>400<br>500  | 717<br>917<br>1117       | QS-40-300<br>QS-40-400<br>QS-40-500<br>QS-40-600 | essential to<br>mention                        |
| 600<br>800<br>1000 | 1317<br>1717<br>2117     | QS-40-800<br>QS-40-1000                          |  |
|                    |                          |  |  |
|                    |                          |  |  |

#### **Technical information:**

- If we receive the order by 12 am, shipment will be in general on the next working day (up to 25 pieces)
- The extension force must be indicated on the order
- The Bansbach 20/40 Quick Ship gas springs include a valve
- Connecting parts, if chosen, will be enclosed
- Material: Piston rod: CeramPro®-coated Cylinder: powder-coated black
- Slow speed, strong end damping
- You will find general information and technical details in our main catalogue
- You will find customized gas springs in our main catalogue

## **Optional connecting parts**

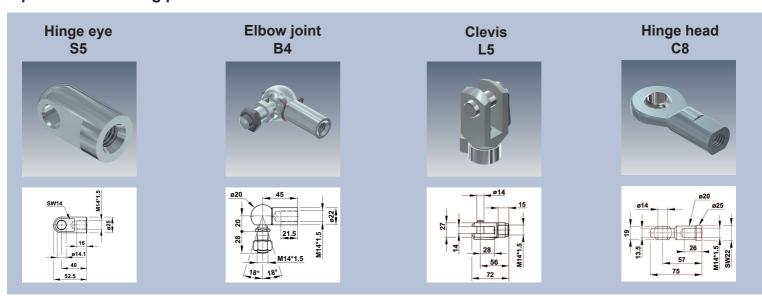

Technische Änderungen und Druckfehler vorbehalten. The flyer is subject to technical alterations and printing mistakes.



# **Size 30/70**

Extension force: 2.000 - 13.000N

| 100 320 QS-70-100 2.000 - 13.000 N<br>200 520 QS-70-200<br>300 720 QS-70-300 In case of an order, it is essential to mention | stroke                                 | extended<br>length (EL2)                         | part number  | force<br>[N]  |
|--|--|--|--|---|
| 600 1320 <b>QS-70-600</b> 700 1520 <b>QS-70-700</b> 800 1720 <b>QS-70-800</b>  | 200<br>300<br>400<br>500<br>600<br>700 | 320<br>520<br>720<br>920<br>1120<br>1320<br>1520 | QS-70-200<br>QS-70-300<br>QS-70-400<br>QS-70-500<br>QS-70-600<br>QS-70-700 | 2.000 - 13.000 N  In case of an order, it is essential to |

#### **Technical information:**

- Shipment in general within 5 working days upon receipt of your order (up to 25 pieces)
- The extension force must be indicated on the order
- The Bansbach 30/70 Quick Ship gas springs include a valve
- Connecting parts, if chosen, will be enclosed
- Material:

Piston rod: hardchromed Cylinder: powder-coated black

- Normal speed and end damping
- You will find general information and technical details in our main catalogue
- You will find customized gas springs in our main catalogue

## **Optional connecting parts**



Technische Änderungen und Druckfehler vorbehalten. The flyer is subject to technical alterations and printing mistakes.

